

Water Temperature Control Unit

DTU162

Higher Dicing Quality with Lower Environmental Impact



Support for Dicing Quality

DTU162 keeps both spindle coolant and wheel coolant at a constant temperature and suitable pressure. It thereby helps manage expansion, contraction, and other undesirable phenomena caused by water temperature fluctuation.

Reduced Environmental Impact

By circulating used wheel coolant and precipitating and filtering water-borne debris, DTU162 significantly reduces water consumption and environmental impact. Further, the refrigerant used is R-407C, a completely non-ozone-depleting gas.

Water Temperature Control Unit DTU162

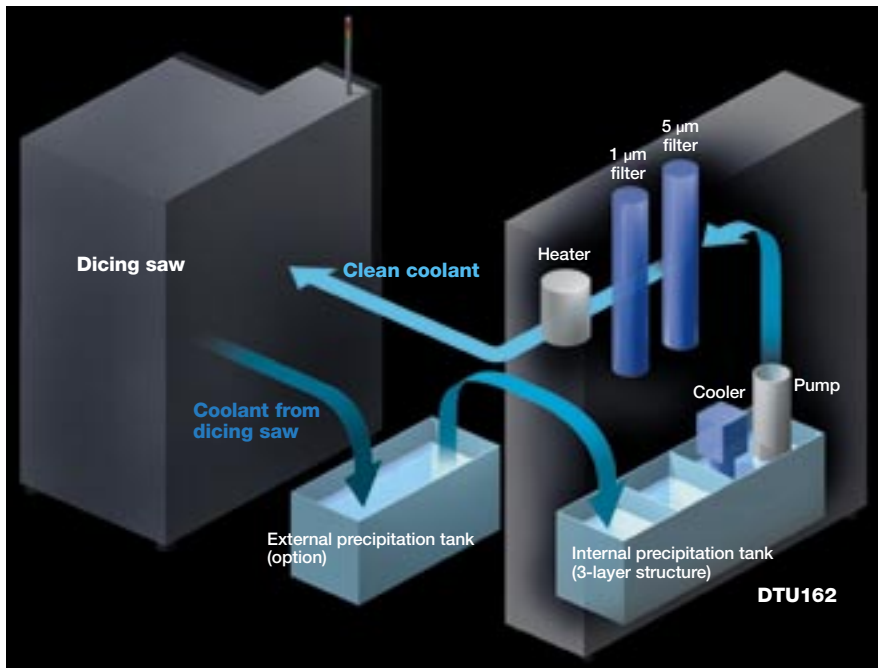


Diagram of wheel coolant flow



Small Footprint

The efficient design of DTU162's interior makes possible a very small unit footprint.

Easy Maintenance

- Use of long 20" filters allows for less frequent exchanges.
- Interior layout designed for maximum ease of regular maintenance.

Applications

Glass, ceramics, ferrite, and other electronic component materials.

DTU162 Specification


Wheel coolant system	Cooling capacity	W	Approx. 600 (at 20 °C)
	Heating capacity	W	Approx. 2000
	Pumping capacity	L/min	10
	Tank volume	L	84
	Filter cartridge length	mm	508
	Filter mesh size 1	µm	3
	Filter mesh size 2	µm	0.5
Spindle coolant system	Cooling capacity	W	Approx. 600
	Heating capacity	W	Approx. 600
	Pumping capacity	L/min	6
	Tank volume	L	7
Temperature setting range	Cutting water	°C	15~30
	Spindle coolant water	°C	15~30
Temperature fluctuation range*	Cutting water	°C	Within ±1.0
	Spindle coolant water	°C	Within ±1.0
Utilities	Power supply		200 V AC ±10 %, 3-phase
	Power consumption		
	When heater is at max. capacity	kW	5.4
	When temperature is stabilized	kW	2.2
	Max. power	kVA	9.3
	Refrigerated cooling water		
	Feed water pressure	MPa	0.2~0.5
	Required flow rate	L	7 (when feed water temperature is 25 °C)**
	Machine dimensions (W x D x H)	mm	430 x 900 x 1,500
	Machine weight	kg	Approx. 240 (when dry) Approx. 360 (when running with full tank)

* When both wheel coolant and spindle coolant are 20 - 25 °C.

** The required flow rate will vary by temperature.

Environmental conditions

- Keep room temperature fluctuations within the same as room temperature between 20~25 °C (fluctuations within ±1 °C).
- The machines should be used in an environment, free from external vibration. Do not install machine near a ventilation opening, heat generation equipment or oil mist generating parts.
- This machine uses water. In case of water leakage, please install the machine on the floor with sufficient waterproofing and drainage treatments.
- Because it circulates wheel coolant, DTU162 may not be appropriate for applications in which purified water is used.
- All pressures specified above are gauge pressures.
- As the above specification may change due to technical modifications. Please confirm when placing your order.
- For further information, please contact your local sales representative.

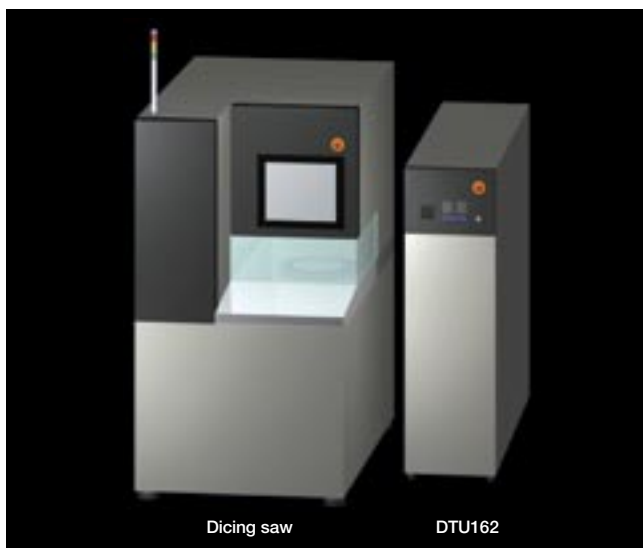

DISCO



ASIA :
DISCO HI-TEC (SINGAPORE) PTE., LTD.
Blk 2 Kaki Bukit Ave.1 #03-06/08 Kaki Bukit
Industrial Estate Singapore 417938
Phone:65-6747-3737 Fax: 65-6745-0266

DISCO HI-TEC (MALAYSIA) SDN. BHD.
Penang Regional Office
Phone:60-4-644-5502 Fax:60-4-645-2285

DISCO HI-TEC (THAILAND) CO., LTD.
Phone:66-2-6188441 Fax:66-2-6188440

DISCO TECHNOLOGY (SHANGHAI) CO., LTD.
Area E, 3rd Floor, Building A1 No.381 FuTeXiYi Road,
WaiGaoQiao Free Trade Zone Shanghai, P. R. China 200131
Phone:86-21-5866-2516 Fax: 86-21-5866-2517

ASIA AGENT :
New Tronics Co., Ltd.
Flat F, 11/F, Valiant Ind. Bldg. 2-12 Au Pui Wan Street,
Fotan Shantin, N.T. HONG KONG
Phone:852-26671431 Fax: 852-26874283

Happy Pole, Ltd.
8th floor, 3-1, No.41 Section 2, Roosevelt Road Taipei,
Taiwan R.O.C.
Phone:886-22-3960651 Fax: 886-22-3943943

Aurotech Systems(Phil's), Inc.
121 Buencamino Street Alabang, Muntinlupa PHILIPPINES
Phone:886-22-3960651 Fax: 886-22-3943943

D.I. Corporation
D.I. Building 58-6 Nonhyun-Dong Kangnam-ku, Seoul KOREA
Phone:82-2-549-5501 Fax:82-2-3446-8087

U.S.A. :
DISCO HI-TEC AMERICA, INC.
3270 Scott Blvd, Santa Clara, CA 95054-3011 U.S.A.
Phone:1-408-987-3776 Fax:1-408-987-3785

Eastern Regional Sales & Service Office
Phone:1-603-656-9019 Fax:1-603-656-9018
Southeastern Regional Sales & Service Office
Phone:1-919-468-6003 Fax:1-919-468-6004
Central Regional Sales & Service Office
Phone:1-972-267-9500 Fax:1-972-267-5612

Southwestern Regional Sales & Service Office
Phone:1-602-431-1412 Fax:1-602-431-1437
Northwest Regional Sales & Service Office
Phone:1-503-644-0323 Fax:1-503-643-8108

EUROPE :
DISCO HI-TEC EUROPE GmbH
Liebigstrasse 8 D-85551 Kirchheim b.Muenchen Germany
Phone:49-89-90903-0 Fax:49-89-90903-199

DISCO HI-TEC FRANCE SARL, Provence Head Office
Phone:33-442-910020 Fax:33-442-910029

DISCO HI-TEC U.K. LTD.
Phone:44-1342-313165 Fax:44-1342-313177

DISCO HI-TEC MOROCCO SARL
Phone:212-6-136-94-04 Fax:212-22-97-38-88

DISCO CORPORATION

13-11 Omori-Kita 2-chome, Ota-ku, Tokyo 143-8580, Japan
Tel:03-4590-1100 Fax:03-4590-1075 • www.disco.co.jp